


# Double Pitch Conveyor Chains - American Series



The chains are similar to double pitch power transmission chains, but the Link Plates have a straight contour and can be produced with standard or large rollers. They are used in conveyor applications where loads are low and speeds are moderate.

Intl. Ref. No.	Chain No.	Pitch (P)	Width between Inner Plates (W) (Min)	Roller Dia (D) (Max)	Pin Dia (d) (Max)	Plate Height (H) (Max)	Plate Thickness (T1)	Width Over Bearing Pin (A) (Max)	Width Over Joint Fasteners (B) (Max)	Avg. Weight Per Metre (Kg)	Tensile Strength (KN) (Min)	Tensile Strength (KN) (Avg.)
C2040	A 08A 01	25.40	7.85	7.92	3.96	11.66	1.50	17.80	21.70	0.49	13.90	18.87
C2042	A 08A 02			15.88						0.84		
C2050	A 102 01	31.75	9.40	10.16	5.08	14.58	2.00	21.80	25.90	0.81	21.80	30.40
C2052	A 102 02			19.05						1.28		
C2060	A 121 01	38.10	12.58	11.91	5.94	18.06	2.39	26.90	31.50	1.20	31.27	41.70
C2062	A 121 02			22.23						1.92		
C2060H	A 122 01	38.10	12.58	11.91	5.94	18.06	3.15	31.20	35.80	1.50	31.27	42.15
C2062H	A 122 02			22.23						1.92		
C2080	A 161 01	50.80	15.75	15.88	7.92	24.05	3.15	33.50	38.90	2.10	55.60	72.60
C2082	A 161 02			28.58						3.18		
C2080H	A 162 01	50.80	15.75	15.88	7.92	24.05	4.00	38.00	43.40	2.52	55.60	72.60
C2082H	A 162 02			28.58						3.60		
C2100	A 201 01	63.50	18.90	19.05	9.53	29.26	4.00	41.10	47.20	3.21	86.87	110.40
C2102	A 201 02			39.67						5.45		
C2100H	A 202 01	63.50	18.90	19.05	9.53	29.26	4.70	43.40	46.70	3.56	86.87	110.40
C2102H	A 202 02			39.67						5.38		
C2120	A 241 01	76.20	25.22	22.23	11.10	36.20	4.70	50.80	57.40	4.66	125.10	144.60
C2122	A 241 02			44.45						7.66		
C2120H	A 242 01	76.20	25.22	22.23	11.10	36.20	5.56	55.10	61.70	5.26	125.10	144.60
C2122H	A 242 02			44.45						8.26		
C2160	A 321 01	101.60	31.55	28.58	14.27	48.26	5.56	65.50	73.40	8.15	222.40	253.40
C2162	A 321 02			57.15						13.00		
C2160H	A 322 01	101.60	31.55	28.58	14.27	48.26	7.14	70.00	77.90	9.06	222.40	253.40
C2162H	A 322 02			57.15						12.77		

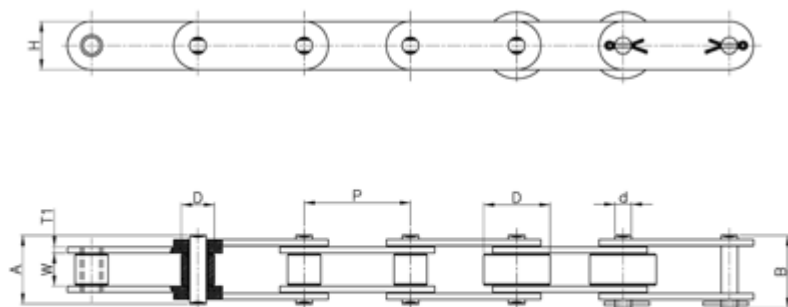