


# Other Standards

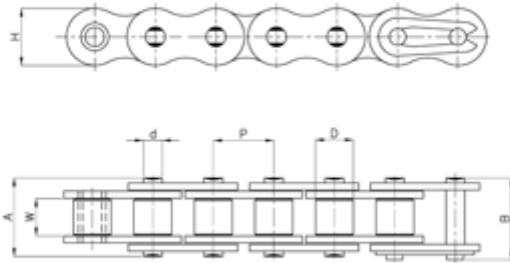

Intl. Ref. No.	Chain No.	Pitch (P)	Width between Inner Plates (W) (Min)	Roller Dia (D) (Max)	Plate Height (H) (Max)	Bearing Pin Dia (d) (Max)	Width Over Bearing Pin (A) (Max)	Width Over Joint Fasteners (B) (Max)	Avg. Weight Per Metre (Kg)	Tensile Strength (KN) (Min)
081	D08001	12.70	3.30	7.75	9.55	3.64	9.75	11.11	0.28	8.00
-	D08101	12.70	4.88	7.75	9.55	3.63	11.70	12.75	0.34	8.00
08MA	D08201	12.70	5.21	8.51	11.65	4.47	14.23	16.00	0.59	17.85
083	D08G01	12.70	4.88	7.75	10.30	4.08	12.35	13.85	0.42	12.01
J 415 F	D08M01	12.70	5.01	7.75	10.00	4.08	14.35	15.45	0.49	15.69
10MA	D10001	15.875	6.48	10.16	14.56	5.08	15.55	17.15	0.78	22.26
-	*D12301	19.05	12.72	14.24	18.80	7.92	31.40	-	2.65	58.85
12BH	D12H 01	19.05	11.68	11.91	15.90	6.06	24.75	26.65	1.39	39.25
	D12601	19.05	9.40	11.91	18.04	5.94	22.30	23.75	1.41	31.19
-	*D14001	22.225	14.28	15.60	23.58	7.92	36.25	-	3.57	88.26
-	D160010005	25.40	35.00	15.88	20.60	8.27	53.75	55.55	3.66	60.02
-	D160010011	25.40	13.05	15.75	20.60	8.14	30.10	36.50	2.57	60.02
-	D560010001	88.90	53.34	53.98	80.20	34.32	117.80	130.00	172.54	980.67
-	SP1729	58.34	21.30	18.26	26.50	10.19	40.85	44.50	2.48	44.62

\* STRAIGHT CONTOUR CHAINS

Note : Wherever International reference is not indicated models have been developed for specific requirements.