


The series of hollow pin chains are used in conveyor applications allowing easy insertion of cross rods or attachments at desired frequency.

TYPE 1- WITH ROLLER, WITHOUT BUSH

Chain No.	Pitch (P)	Width between Inner Plates (W) (Min)	Roller Dia (D) (Max)	Plate Height (H) (Max)	Pin Inner Diameter (d1) (Min)	Pin outer Diameter (d2)	Pin Length (A) (Max)	Avg. Weight Per Metre (Kg)	Strength (KN) Min	End Condition
D 061 01 HP 01 *	9.525	5.72	6.35	8.20	3.30	4.77	13.75	0.35	5.40	E
D083 01 HP 02	12.70	7.75	8.51	11.80	4.50	6.28	17.00	0.58	10.79	E
D 101 01 HP 02	15.875	9.65	10.16	14.70	5.18	7.02	19.60	0.77	14.71	E
D 102 01 HP 01	15.875	9.40	10.16	14.70	5.18	7.02	20.60	0.82	14.70	E
D 120 01 HP 01	19.05	11.68	12.07	16.10	5.85	8.09	22.70	0.98	16.68	E
D 160 01 HP 01	25.40	17.02	15.88	21.00	8.33	11.61	36.10	2.21	32.76	E

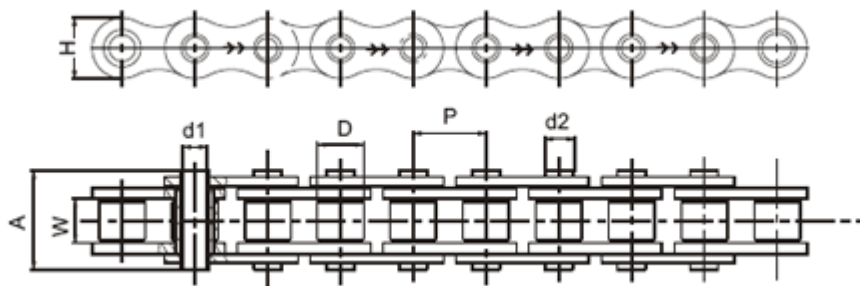

TYPE 2- WITH ROLLER AND BUSH

Chain No.	Pitch (P)	Width between Inner Plates (W) (Min)	Roller Dia (D) (Max)	Plate Height (H) (Max)	Pin Inner Diameter (d1) (Min)	Pin outer Diameter (d2)	Pin Length (A) (Max)	Avg. Weight Per Metre (Kg)	Strength (KN) Min	End Condition
D 120 01 HP 02	19.05	11.68	12.07	16.10	5.00	8.09	22.70	1.13	22.60	E
D160 01 HP 02	25.40	17.02	15.88	21.00	5.00	8.26	33.90	2.34	36.20	E