


The series of hollow pin chains are used in conveyor applications allowing easy insertion of cross rods or attachments at desired frequency.

### TYPE 1- WITH ROLLER, WITHOUT BUSH

| Chain No.        | Pitch (P) | Width between Inner Plates (W) (Min) | Roller Dia (D) (Max) | Plate Height (H) (Max) | Pin Inner Diameter (d1) (Min) | Pin outer Diameter (d2) | Pin Length (A) (Max) | Avg. Weight Per Metre (Kg) | Strength (KN) Min | End Condition |
|------------------|-----------|--------------------------------------|----------------------|------------------------|-------------------------------|-------------------------|----------------------|----------------------------|-------------------|---------------|
| D 061 01 HP 01 * | 9.525     | 5.72                                 | 6.35                 | 8.20                   | 3.30                          | 4.77                    | 13.75                | 0.35                       | 5.40              | E             |
| D083 01 HP 02    | 12.70     | 7.75                                 | 8.51                 | 11.80                  | 4.50                          | 6.28                    | 17.00                | 0.58                       | 10.79             | E             |
| D 101 01 HP 02   | 15.875    | 9.65                                 | 10.16                | 14.70                  | 5.18                          | 7.02                    | 19.60                | 0.77                       | 14.71             | E             |
| D 102 01 HP 01   | 15.875    | 9.40                                 | 10.16                | 14.70                  | 5.18                          | 7.02                    | 20.60                | 0.82                       | 14.70             | E             |
| D 120 01 HP 01   | 19.05     | 11.68                                | 12.07                | 16.10                  | 5.85                          | 8.09                    | 22.70                | 0.98                       | 16.68             | E             |
| D 160 01 HP 01   | 25.40     | 17.02                                | 15.88                | 21.00                  | 8.33                          | 11.61                   | 36.10                | 2.21                       | 32.76             | E             |

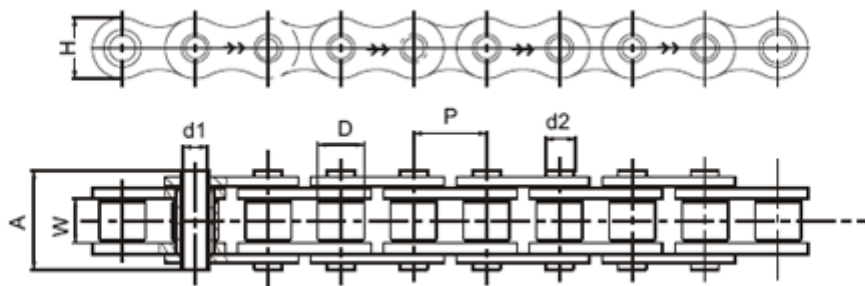

### TYPE 2- WITH ROLLER AND BUSH

| Chain No.      | Pitch (P) | Width between Inner Plates (W) (Min) | Roller Dia (D) (Max) | Plate Height (H) (Max) | Pin Inner Diameter (d1) (Min) | Pin outer Diameter (d2) | Pin Length (A) (Max) | Avg. Weight Per Metre (Kg) | Strength (KN) Min | End Condition |
|----------------|-----------|--------------------------------------|----------------------|------------------------|-------------------------------|-------------------------|----------------------|----------------------------|-------------------|---------------|
| D 120 01 HP 02 | 19.05     | 11.68                                | 12.07                | 16.10                  | 5.00                          | 8.09                    | 22.70                | 1.13                       | 22.60             | E             |
| D160 01 HP 02  | 25.40     | 17.02                                | 15.88                | 21.00                  | 5.00                          | 8.26                    | 33.90                | 2.34                       | 36.20             | E             |